



# HEIDENHAIN

Votre agent :

**araxe**

72, rue Yves le Coz  
78000 - VERSAILLES

tél : 01 30 21 48 49  
contact@araxe.com

<http://www.araxe.com>



Product Information

## **EIB 741**

External Interface Box

# EIB 741

The EIB 741 is an external interface box for precise position measurement. It is ideal for inspection stations and multipoint inspection apparatuses as well as for mobile data acquisition, such as in machine inspection and calibration.

A maximum of **four HEIDENHAIN encoders**, either with sinusoidal incremental signals ( $\sim 1 V_{PP}$ ) or with EnDat interfaces (EnDat 2.1 and EnDat 2.2) can be connected to the EIB 741.

The EIB 741 subdivides the periods of the incremental signals up to 4096-fold for **measured-value generation**. The deviations within one signal period are automatically reduced by adjustment of the sinusoidal incremental signals.

The integrated **measured-value memory** enables the EIB 741 to save up to 250000 measured values per axis. Internal or external triggers can be used for axis-specific storage of the measured values.


A standard Ethernet interface using TCP/IP or UDP communication is available for **data output**. This permits direct connection to a PC, laptop or industrial PC. The type of measured-value transfer can be selected through the operating mode (transfer of individual values, block transfer, or transfer upon software request).

Driver software for Windows, Linux and LabVIEW is included in the items supplied, in order to **process the measured values** on the PC. The driver software facilitates programming of customer applications. It also contains program examples demonstrating the performance range of the EIB 741.

Thanks to the compact **dimensions**, two EIB 741 interface boxes fit next to each other in a 19-inch housing. They occupy one height unit.

The EIB 741 is ideal for applications requiring high-resolution encoder signals and fast data logging. Ethernet transmission also enables you to use switches or hubs for connecting more than one EIB. It is also possible to use WLAN transmission, for example.

## Basic Circuit Diagram

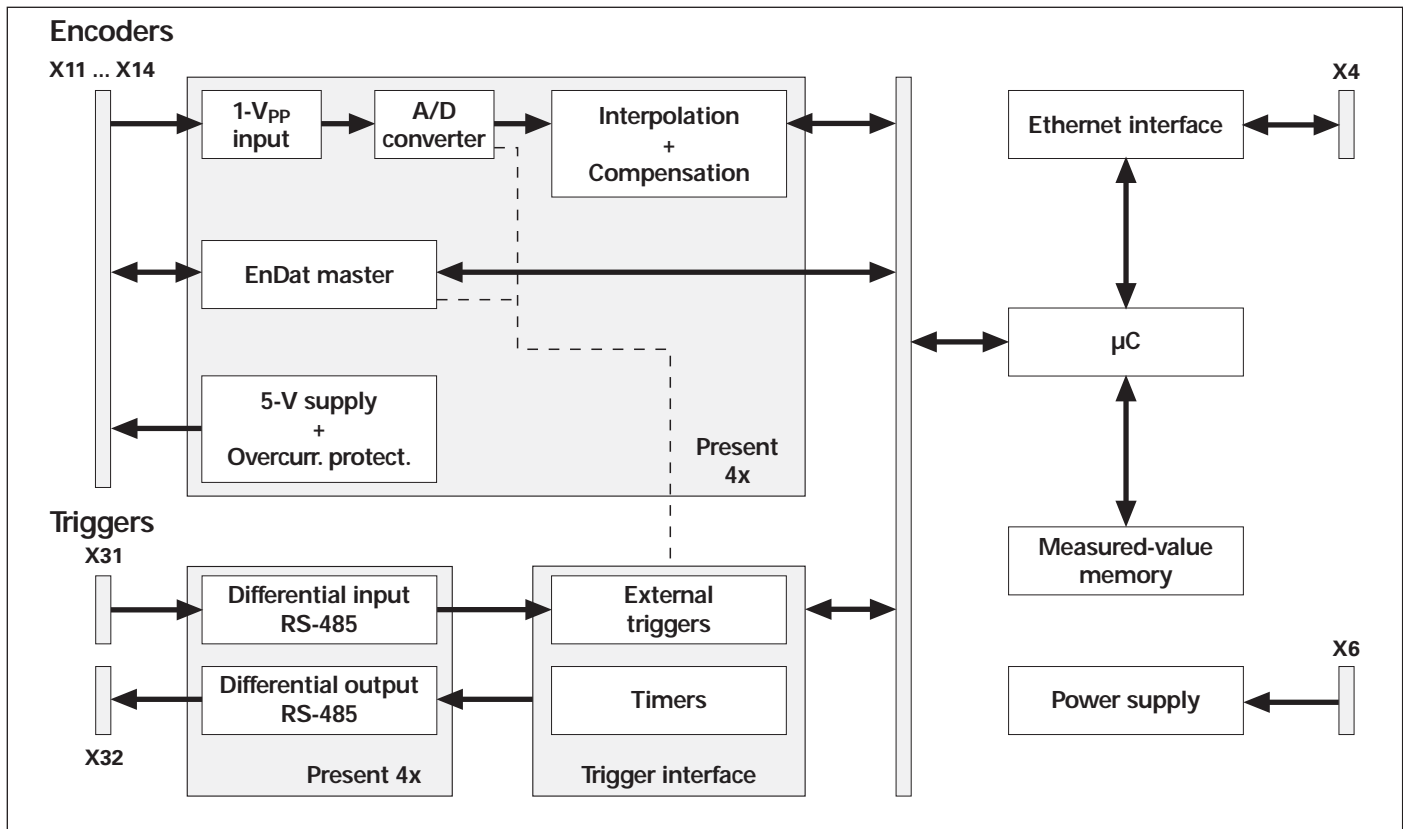

Specifications	EIB 741		
<b>Encoder inputs</b>	D-sub connections 15-pin, female (X11 to X14), for four encoders		
Input signals <sup>1)</sup> (switchable)	$\sim 1 V_{PP}$	EnDat 2.1	EnDat 2.2
Power supply for encoders	5.12 V $\pm$ 3%; max. 450 mA per channel Overcurrent protection (automatic switch-off, resettable) at 550 mA		
Input frequency	$\leq 500$ kHz	–	–
Subdivision factor	4096-fold	–	–
Signal adjustment	Automatic adjustment of offset, phase and amplitude	–	–
Cable length <sup>2)</sup>	$\leq 150$ m	$\leq 150$ m	$\leq 100$ m
Data register for measured values	48 bits (only 44 bits are used)		
<b>Measured-value memory</b>	Approx. 250 000 position values per channel		
<b>Measured-value trigger</b>	Synchronous storage of the measured values of all four channels alternatively through external or internal trigger <b>External:</b> – Signal via trigger input – Software command (via Ethernet) <b>Internal:</b> – Timer		
Trigger input	D-sub connection 9-pin, male Differential inputs as per RS-485 (terminating resistors can be activated)		
Trigger output	D-sub connection 9-pin, female 4 differential outputs as per RS-485		
<b>Access to measured values</b>	Depends on the selected operating mode (see separate table)		
<b>Driver software and demonstration program</b>	For Windows, Linux, LabVIEW Program examples		
<b>Data interface</b> <sup>3)</sup>	Ethernet as per IEEE 802.3 (max. 1 Gbit)		
Network address	Automatic assignment through DHCP (Dynamic Host Configuration Protocol) or manual assignment		
<b>Dimensions</b>	Approx. 213 x 152 x 42 mm		
<b>Operating temperature</b> <b>Storage temperature</b>	0 °C to 45 °C 0 °C to 70 °C		
<b>Power connection</b>	100 Vac to 240 Vac ( $\pm$ 10%), 50 Hz to 60 Hz ( $\pm$ 2 Hz), power consumption approx. 30 W		

<sup>1)</sup> 11  $\mu A_{PP}$  upon request

<sup>2)</sup> The supply voltage range of the encoder must be maintained; specified cable length applies when HEIDENHAIN cables are used.

<sup>3)</sup> The quality of the data cable for connecting the EIB to the PC must match the requested transfer rate and the cable length.

Note:




The features can be extended by updating the firmware.

# Operating Modes




	Soft Realtime Mode	Recording	Streaming	Polling
<b>Properties</b>	Immediate transmission of measured values when the trigger event occurs	Storage of measured values in the EIB's internal measured-value memory	Buffering and block transfer of measured values	Software request from customer application
<b>Selectable trigger sources</b>	All internal and external sources			By software command
<b>Data transfer protocol</b>	UDP	TCP/IP	UDP	TCP/IP
<b>Trigger rate</b>	≤ 10 kHz (Access time to position values < 100 μs)	≤ 50 kHz	≤ 50 kHz max. 1 200 000 bytes/second	≤ 50 kHz

## Electrical Connection

### Pin layout $\overleftrightarrow{\text{EnDat}}$

15-pin D-sub connector, male														
	Power supply					Incremental signals <sup>1)</sup>				Absolute position values				Other
	4	12	2	10	6	1	9	3	11	5	13	8	15	7/14
	U <sub>P</sub>	Sensor U <sub>P</sub>	0V	Sensor 0V	Internal shield	A+	A-	B+	B-	DATA	DATA	CLOCK	CLOCK	Vacant
														

### Pin layout $\sim 1 V_{PP}$

15-pin D-sub connector, male															
	Power supply					Incremental signals					Other signals				
	4	12	2	10	1	9	3	11	14	7	13	8	6	5/15	
$\sim 1 V_{PP}$	U <sub>P</sub>	Sensor 5V	0V	Sensor 0V	A+	A-	B+	B-	R+	R-	Vacant	L1 <sup>2)</sup> H <sup>3)</sup>	L2 <sup>2)</sup> L <sup>3)</sup>	Vacant	
															

**Cable shield** connected to housing; **U<sub>P</sub>** = power supply voltage  
**Sensor:** The sensor line is connected internally with the corresponding power line.  
 Vacant pins or wires must not be used!

<sup>1)</sup> Only with ordering designation EnDat 01 and EnDat 02

<sup>2)</sup> Only for LIDA 4xx

<sup>3)</sup> Only for LIF 481

## HEIDENHAIN

**DR. JOHANNES HEIDENHAIN GmbH**  
 Dr.-Johannes-Heidenhain-Straße 5  
 83301 Traunreut, Germany  
 ☎ +49 8669 31-0  
 ✉ +49 8669 5061  
 E-mail: info@heidenhain.de

[www.heidenhain.de](http://www.heidenhain.de)

### For more information

• Product overview: *Interface Electronics*